



ACCENDO
LIGHTING

Hazardous Environment "Multi-Purpose" LED Area Light

Petroleum production, refineries, storage, and transportation facilities. Utility power generation plants and sub-stations. Mining operations and processing. Off shore oil platforms. Food processing and distilling. Paint and chemical production/storage. Wastewater treatment plants. Aerospace and military facilities (hazardous locations). Flour/grain and other fine dust particulate processes.

Project Name:	Type:
Location:	
Model Number:	
Approved By:	Date:
Notes:	




FEATURES:

- Die Cast "copper free" aluminum housing
- IK rated for vibration applications
- 140 LPW CREE LED Chips >70CRI
- Suitable for wall or ceiling mount installations. See "Options" for all available mounting configurations and accessories.
- Up to 60% reduced energy consumption over traditional HID and fluorescent sources.
- Ambient operating temperatures -40-60°C
- L70 >150,000 Hours
- Standard 5 Year Manufacturer's Warranty

LISTINGS:

- Class I, Division 1, Groups C,D
- Class I, Division 2, Groups A,B,C,D
- Class II, Division 1, Groups E,F,G
- Class II, Division 2, Groups E,F,G
- Class III
- UL 1598 Wet location
- UL 1589A Marine Outside Type
- UL844
- CSA C22.2 No. 137/No. 250.0
- NEMA 4X
- IP67
- IEC EX
- ATEX

Dimensions:

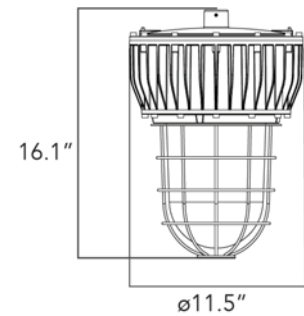

Ordering Information:

Ordering Example: L-LED-EXP-040-F-40-Z40-PM-WG

Series	Wattage/Lumens	Housing	Kelvin/CCT	Beam Angle	Mounting	Options
AL-LED-EXP	040 - 4000lms 050 - 5000lms 060 - 6000lms 080 - 8000lms	F	40 - 4000K 50 - 5000K 57 - 5700K	Z40 - 40° Z60 - 60° Z90 - 90° Z120 - 120° Z140 - 140°	PM - Pole Station APM - 25° Pole Station CB - Ceiling Bracket P - Pendant Pole AP - 12° Pendant Pole WB - Wall Bracket	WG - Wire Guard DR - Dome Reflector ADR - Angle Reflector


Performance Data

Wattage	Lumens	LPW	CRI
40	5,600	140	70
50	7,000	140	70
60	8,400	140	70
60	11,200	140	70

Powered By




Distributions/Optics

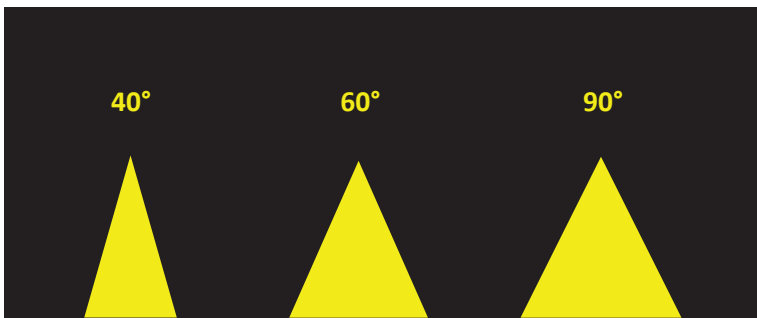


Consult factory for current IES photometric files


Mounting Accessories/Options




Wall Bracket (Suffix-WB)




Pole Mount (Suffix-PM)

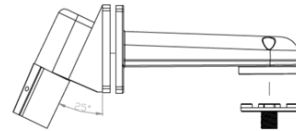

Angle Pole Mount (Suffix-APM)



Dome Reflector (Suffix-DR)



Angle Dome Reflector (Suffix-ADR)


Ceiling Bracket




Ex-Box

+

Pendant Mount (Suffix P)



AnglePendant Mount (Suffix AP)



Note: Consult factory for complete list of mounting accessories.