

General Description:

The Accendo Lighting Indirect Direct Suspended LED (ALDI) is a specification-grade LED linear luminaire that's ideal for offices, conference rooms, retail, hospitality, healthcare, and commercial applications. Inspired by the ancient geometrical shape, the Vesica Direct Indirect Suspended (ALDI) embodies a level of sophistication and elegance that easily compliments your personal style. The luminaire is more than just light. This distinctively contoured luminaire can stand alone as an extraordinary lighting statement piece or will integrate naturally into any existing room architecture. From the customized light distributions to the multiple color finishes, the luminaire is engineered to be an expression of you. Boldly unique. The low-profile body, only 3" high, is offered in 4 ft. or 8 ft. models as well as continuous rows. It's available lumen packages range from 4,000L to 20,000L with significant efficacies to match.



FEATURES

- Lumens packages ranging from 4000L to 20000L.
- A high performing LED luminaire that offers unique lens aesthetics and a sleek curved profile.
- Available for continuous row or individual placement.
- Choice of light distributions to meet different application needs.
- Tunable White (TW) option available
- 80CRI with 90CRI option available.

CONTROLS

- Leviton Intellect, Enlighted PIR micro sensor options available.
- Consult factory for control options.

CONSTRUCTION

- Extruded aluminum and steel post-painted textured matte white, matte black, silver, or custom color (consult factory).
- Post painted die-cast end caps.
- High efficiency frosted acrylic lens.

MOUNTING

- Standard cable canopy with pendant mount accessories available.

ELECTRICAL

- Voltage: 120-277V AC input
- Driver: Class 2, constant current, calibrated to lumen package (0-10V dimming standard)

WARRANTY

- Backed by Accendo's limited 5-year warranty.

Ordering Information


Ordering Example: ALDI-4-7000L-40K-DIM-55-C10-WH-EM-XLS

ALDI	Size	MODEL	CCT	Driver	Distribution	Mounting	Finish	Options	Series
									XLS
	4 4 FT	4000L 5000L 7000L 10000L	30K 3000K 35K 3500K 40K 4000K	DIM Dim 0-10V, 120-277V DIM 1 1% Dim, 120-277V	55 50% Up/ 50% Down 37 30% Up/ 70% Down 01 0% Up/ 100% Down	C5 5 ft Cable Canopy C10 10 ft Cable Canopy PND ¹ Pendant Canopy	WH Matte White BL Matte Black SV Silver	EM Emergency Battery Back-up GTD Generator Transfer Device ZLO Leviton Intellect™ Micro Sensor SU5E Enlighted PIR Micro Sensor MD Middle of Row (continuous row) ER End of Row (continuous row) 90C 90CRI	
	8 8 FT	8000L 10000L 14000L 20000L							
	4 4 FT	2000L 4000L	TW 2700K TO 6500K	DL Dali Program, 120-277V DX Dexal Program, 120-277V					
	8 8 FT	4000L 8000L							

1. PND option must be ordered with pendant accessories. More information in the Accessories section (page 3).

Additional:

STANDARD SIZES

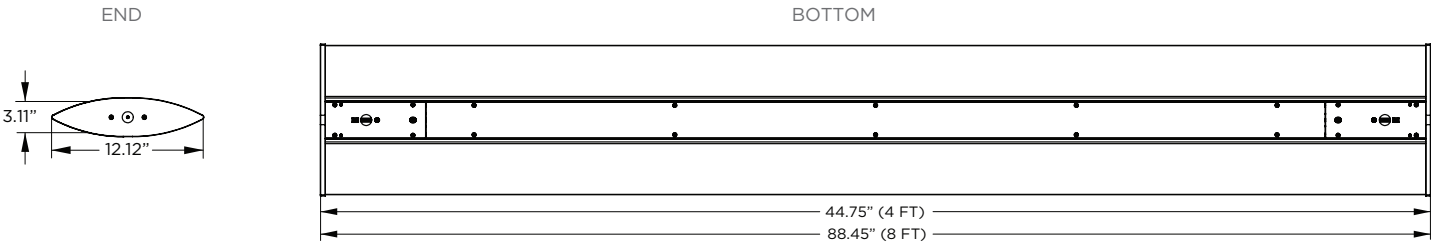

ACCESSORIES (SOLD SEPARATELY)


PENDANT-A		
	LENGTH	FINISH
18	18" Pendant	MW Matte White
24	24" Pendant	CM Color Match
36	36" Pendant	

- DESCRIPTION
- Stationary pendant & canopy set
 - Thread 1/4" IP
 - Requires two per single fixture
 - Must select PND in the order logic options
 - For continuous row consult factory



PENDANT-B		
	LENGTH	FINISH
18	18" Pendant	MW Matte White
24	24" Pendant	CM Color Match
36	36" Pendant	

- DESCRIPTION
- Swivel pendant & canopy set
 - Thread 1/4" IP
 - Requires two per single fixture
 - Must select PND in the order logic options
 - For continuous row consult factory



CONTINUOUS ROW JOINER	
VES8000	Continuous Row joiner

- DESCRIPTION
- Securely joins luminaires end to in a continuous row
 - One kit is required per continuous row joint
 - Kit includes one joiner and four screws

