



ACCENDO LIGHTING



General Description:

All-new high efficiency T5HO/T8 fixture for cost effective lighting of medium- and high-bay warehouses, manufacturing plants, sports facilities, and retail spaces.

New Engineered Lighting:

Design features precision-formed beveled specular reflector to achieve maximum light output. White aluminum reflector also available (suffix WHT). Optional wireguard for with innovative fastener design allows easy lamp access.

Lamping Options:

Delivers either 11,000+ lumens from ten economical T8 lamps, 45,000+ lumens from ten economical T5HO lamps, 18,000+ lumens from twelve T8 lamps, or 54,000+ lumens from twelve T5HO lamps; replaces HID fixtures on a one-for-one basis.


Mounting Options:

Surface, pendant, and chain or aircraft cable mounting available.

Specifications:

- Housing:** Die-formed heavy-gauge cold rolled steel.
- Finish:** Post-painted white housing with either anodized specular for direct lighting or slotted for indirect.
- Ballast Access:** Ballasts are accessible by removal of snap on cover or optional screw.
- Ballasts:** Designed for use with Class P electronic ballasts for T5HO/T8 lamps.
- Lampholders:** Accepts rotary locking sockets and T5HO/T8 lamps.
- Mounting:** Fixtures designed for surface, pendant, chain, or aircraft cable mounting.
- Wireguard (optional):** Combination 11 ga. wire (A.W.G. Standard) with white powder-coat finish. Attaches with clips for easy lamp access.



Ordering Information

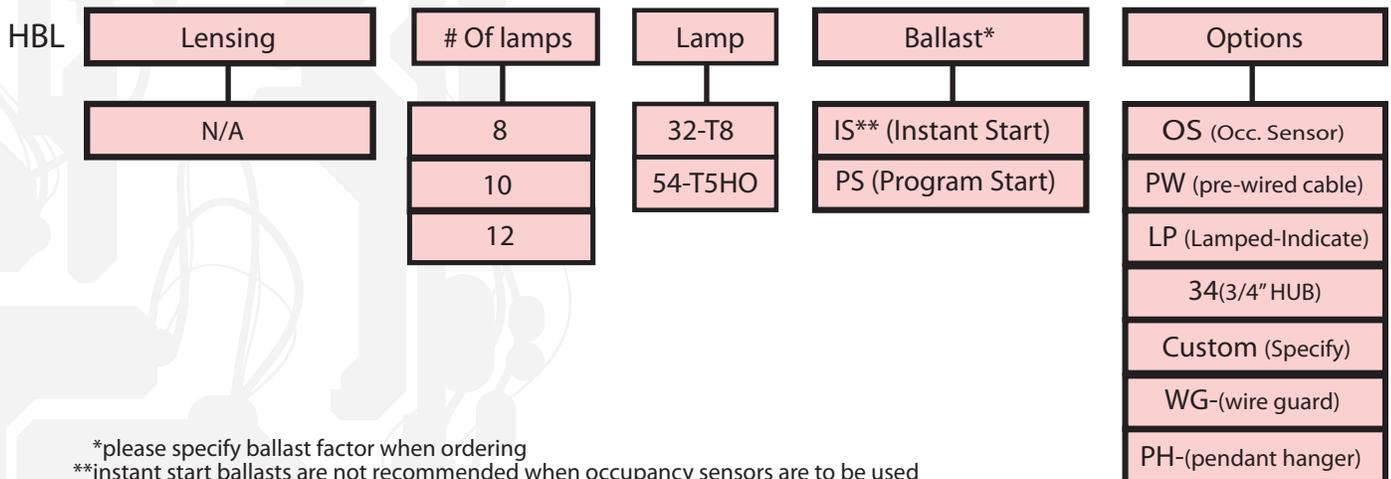


*please specify ballast factor when ordering
 **instant start ballasts are not recommended when occupancy sensors are to be used

AL HBL-Series T8/T5 High Bay Fixture


Dimensions:

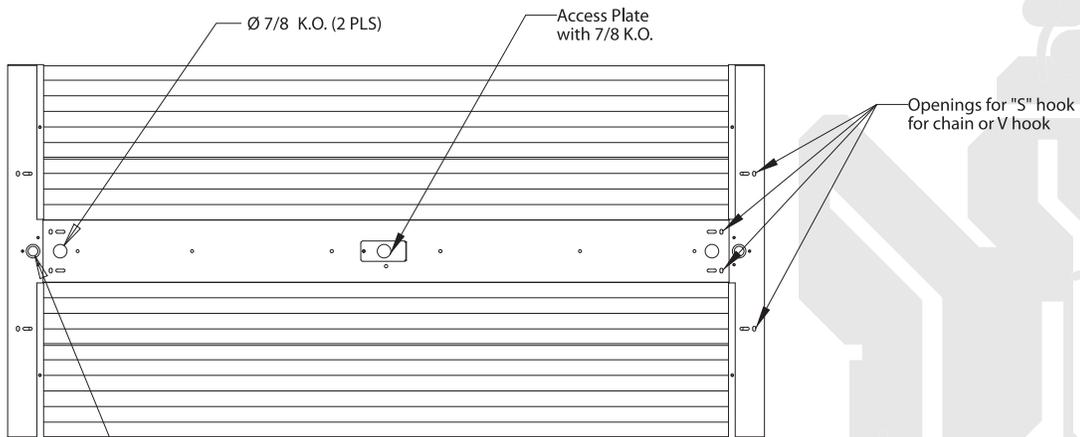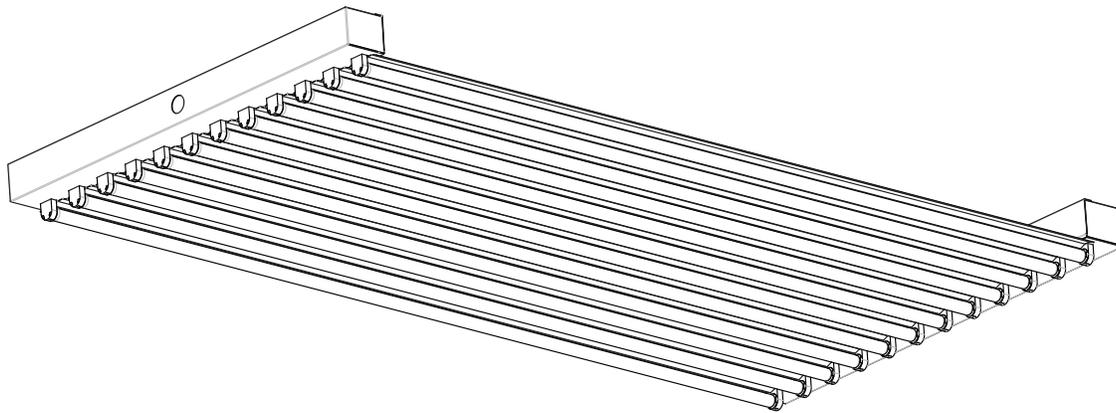

TOP VIEW

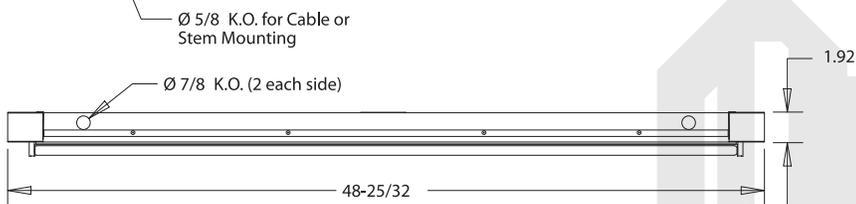

SIDE VIEW

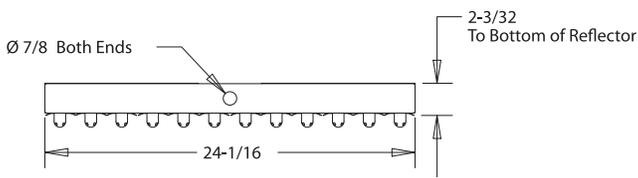

END VIEW

