



ACCENDO LIGHTING



General Description:

An all-purpose industrial strip for a Wide range of bi-pin and slimline fluorescent Lighting applications. All fixture parts built for easy access to ensure ease of installation and maintenance. Side knockouts are included for convenience Chain hanger slots are provided on the sides and back. Symmetrical reflector for solid downlight performance

Construction:

A high quality, all-purpose economy Industrial with symmetrical reflector and patented pivoting end plates. On an assembled fixture, the pivoting ends fold down to protect the sockets and provide compact shipping and storage. When rotated 90 degrees into upright position, the ends snap and lock into place.

Mounting Options:

Fixtures designed for surface, stem, or chain hanging. Can be installed as individual Units or in continuous rows.

Specifications:

Housing:

Die-formed 20-gauge cold rolled steel. All fixtures UL listed.

Finish:

Phosphate coating-baked white enamel with 82% reflectivity.

Ballast Cover:

Snap-on type; fabricated in two sections for 72" and 96" bodies to simplify installation.

Ends:

Fixtures designed for surface, stem, or chain hanging. Can be installed as individual Units or in continuous rows.


Ordering Information

IS or IST	Length	# Of lamps	Lamp	Ballast*	Options
	2,3,4'	1	17-T8	IS** (Instant Start)	OS (occ. sensor)
	2,3,4' (tandem)	2	25-T8	PS (Program Start)	PW (pre-wired cable)
		3	32-T8		LP (lamped-specify)
		Lamps per section	48-T8HO		Custom (Specify)
			54-T5HO		
			96-T8HO		

*please specify ballast factor when ordering
 **instant start ballasts are not recommended when occupancy sensors are to be used

Dimensions:

SEI Pivot End Shallow Economy Industrial back plans

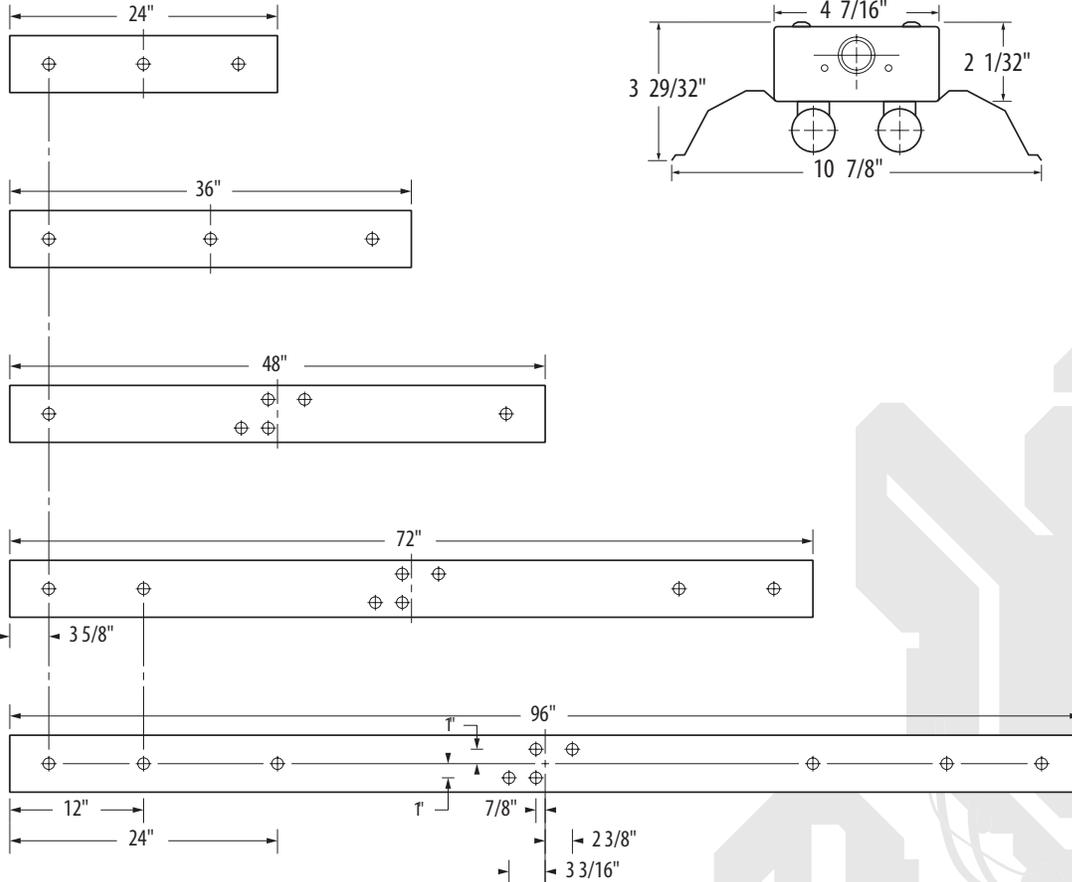

End View: SEI Pivot End

